

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>C09J 167/04, D04H 1/64</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 97/04036</b> <b>(43) International Publication Date:</b> 6 February 1997 (06.02.97)
<b>(21) International Application Number:</b> PCT/US96/11864 <b>(22) International Filing Date:</b> 18 July 1996 (18.07.96)  <b>(30) Priority Data:</b> 60/001,274                      20 July 1995 (20.07.95)                      US  <b>(71) Applicant:</b> THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US).  <b>(72) Inventor:</b> NODA, Isao; 1568 Hunter Road, Fairfield, OH 45014 (US).  <b>(74) Agents:</b> REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217 (US).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> NONWOVEN MATERIALS COMPRISING BIODEGRADABLE COPOLYMERS		
<b>(57) Abstract</b>  This invention relates to a nonwoven material comprising an adhesive comprising polyhydroxyalkanoate (PHA). This invention also relates to an absorbent article comprising such nonwoven material. This invention also relates to a composition comprising PHA and a surfactant. This invention further relates to a method for preparing the nonwoven.		

AN

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## NONWOVEN MATERIALS COMPRISING BIODEGRADABLE COPOLYMERS

5

### TECHNICAL FIELD

This invention relates to nonwoven materials and adhesives therefor, comprising biodegradable copolymers.

### BACKGROUND

10 Polymers find uses in a variety of plastic articles including films, sheets, fibers, foams, molded articles, adhesives, nonwoven materials and many other specialty products which usually have a short use cycle. The majority of these products end up in the solid waste stream, headed for limited and increasingly expensive landfill space. While recycling has sought to address this problem, the nature of polymers and polymer products limits the number of possible recycling applications. Repeated processing of polymers and polymer products results in degradation of material and consequently poor mechanical properties. For example, different grades of chemically similar plastics (e.g., polyethylenes of 15 different molecular weights, as used in milk jugs and grocery sacks) mixed upon collection can cause processing problems that make the reclaimed material inferior or unusable. 20

In absorbent article applications such as diapers, sanitary napkins, pantliners and the like, the product contains several different types of plastics. In these cases, recycling is particularly costly because of the difficulty in separating the different components. Disposable products of 25 this type generally comprise some sort of fluid-permeable topsheet material, an absorbent core, and a fluid-impermeable backsheet material. Typically, absorbent core materials comprising wood pulp fibers and the like are compostable. However, typical topsheet and backsheet materials prepared from woven, nonwoven, or porous formed-film polyethylene or 30 polypropylene materials are noncompostable. Thus there is a need to replace these noncomposatable materials with compostable material to provide disposable products which are compostable. U.S. Patent No. 4,880,592, Martini et al., discloses a compostable film which, while cumbersome to prepare, is said to be suitable for diaper backsheet applications. An easily prepared, compostable nonwoven, suitable for a 35 diaper topsheet, is desired for compostable product.

However, any new compostable materials and the articles and products prepared from them must possess certain mechanical properties to facilitate manufacture and consumer acceptance. For example, proper tensile strength, tensile modulus, tear strength, and the like are required for easily preparing the compostable article. The consumer requires properties such as impact strength, puncture strength, and moisture transmission, which influence the compostable article's durability.

Once the absorbent article is disposed of and enters a composting process, other properties become important. The disposable should undergo an initial breakup to much smaller particles during the initial stages of composting.

In the past, the biodegradability and physical properties of a variety of polyhydroxyalkanoates (PHAs) have been studied. PHAs are polyester compounds produced by a variety of microorganisms, such as bacteria and algae. While PHAs have been of general interest because of their biodegradable nature, their use as a plastic material has been hampered by their thermal instability. PHB degrades at temperatures near its melt temperature. Due to this thermal instability, commercial applications of PHB have been limited.

Based on the foregoing, there is a need for nonwoven materials and articles containing them that can biodegrade. To that end, there is a need for a nonwoven material whose fibers are bound together by an adhesive that can biodegrade. In effect, such biodegradable articles would facilitate the "recycling" of plastic articles into another usable product, topsoil, through composting.

#### Objects of the Invention

It is an object of the present invention to provide a nonwoven material comprising an adhesive comprising a biodegradable polyhydroxyalkanoate (PHA).

It is also an object of the present invention to provide a biodegradable PHA as an adhesive for nonwoven materials.

It is also an object of the present invention to provide a composition comprising a biodegradable PHA useful as an adhesive for nonwoven materials.


It is also an object of the present invention to provide a disposable sanitary article comprising a nonwoven comprising an adhesive comprising a biodegradable PHA.

It is also an object of the present invention to provide a method of using a biodegradable PHA to make nonwoven materials.

### SUMMARY


This invention relates to biodegradable PHA copolymers as adhesives useful in preparing nonwovens, and the nonwovens made from them.

The adhesive comprises a PHA of least two different randomly repeating monomer units wherein each randomly repeating monomer unit has the structure:

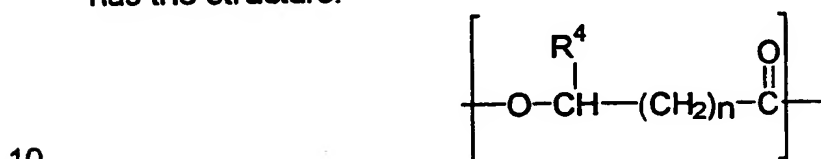

wherein each  $\text{R}^4$  is chosen from H, or any of  $\text{C}_1$  to about  $\text{C}_{19}$  alkyl or  $\text{C}_1$  to about  $\text{C}_{19}$  alkenyl and each  $n$  is from 1 to about 4.

Preferably, this invention further relates to adhesives useful in preparing nonwovens, and the nonwovens made therefrom, wherein the copolymer comprises at least two randomly repeating monomer units wherein the first monomer unit has the structure;

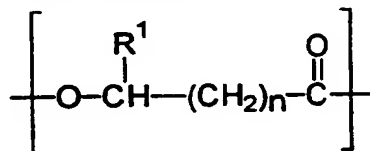

wherein  $\text{R}^1$  is H, or  $\text{C}_1$  to about  $\text{C}_{19}$  alkyl or  $\text{C}_1$  to about  $\text{C}_{19}$  alkenyl, and  $n$  is independently 1 or 2; the second monomer unit has the structure:



wherein  $\text{R}^2$  is  $\text{C}_3$  to about  $\text{C}_{19}$  alkyl or  $\text{C}_1$  to  $\text{C}_{19}$  alkenyl; and wherein at least 50% of the random repeating monomer units have the structure of the first monomer unit.

More preferably, the first monomer unit has the above structure, wherein  $\text{R}^1$  is H,  $\text{C}_1$ , or  $\text{C}_2$  alkyl and  $n$  is 1 or 2.

This invention further relates to nonwoven materials and articles comprising them comprising a biodegradable copolymer as an adhesive.

### DETAILED DESCRIPTION

This invention provides a biodegradable nonwoven employing a compostable adhesive as a binder, and disposable articles containing these nonwovens which are easily processed into the article and posses  
5 increased biodegradability and/or compostability.

As used herein, "alkyl" means a saturated carbon-containing chain which may be straight or branched; and substituted (mono- or poly-) or unsubstituted. "Substituted," when applied to any radical, refers to any art recognized substitution. Examples of these substitutions are known in the  
10 art and can be found in and prepared using, for example, March, Advanced Organic Chemistry, 3rd Ed. (Wiley-Interscience), hereby incorporated by reference, and other similar sources.

As used herein, "unsaturated" means alkyl containing one or more double bonds.

15 As used herein, "alkenyl" means a carbon-containing chain which may be monounsaturated (i.e., one double bond in the chain) or polyunsaturated (i.e., two or more double bonds in the chain); straight or branched; and substituted (mono- or poly-) or unsubstituted.

As used herein, "PHA" means a polyhydroxyalkanoate, as described  
20 throughout the specification.

As used herein, "PHB" means the homopolymer poly-3-hydroxybutyrate.

As used herein, "PHBV" means the copolymer poly(3-hydroxybutyrate-co-3-hydroxyvalerate). This copolymer is also known as  
25 PHB-PHV and BIOPOL.

As used herein, "biodegradable" means the ability of a compound to ultimately be degraded completely by microorganisms and/or natural environmental factors.

As used herein, "compostable" means a material that meets the  
30 following three requirements:

- (1) the material is capable of being processed in a composting facility for solid waste;
- (2) if so processed, the material will end up in the final compost; and
- 35 (3) if the compost is used in the soil, the material will ultimately biodegrade in the soil.

For example, a polymer material present in solid waste submitted to a composting facility for processing does not necessarily end up in the final compost. Certain composting facilities subject the solid waste stream to air classification prior to further processing, in order to separate paper and other materials. A polymer would most probably be separated from the solid waste stream in such an air classification and therefore not be processed in the composting facility. Nevertheless, it may still be a "compostable" material according to the above definition because it is "capable" of being processed in a composting facility.

10       The requirement that the material ends up in the final compost typically means that it undergoes a form of degradation in the composting process. Typically, the solid waste stream is subjected to shredding. Here the nonwoven appears in the final compost regardless of composition, biodegradable or not. Therefore, meeting requirement (2) is not enough for  
15       a material to be compostable within the present definition.

      The compostable material differs from material like polyethylene in that, (3) the material ultimately will biodegrade in the soil. This biodegradability requirement does not require the composting process or the use of composting soil. Nor is it necessary that biodegradation be rapid.  
20       Provided that the nonwoven and its decomposition products are non-toxic or polluting, their biodegradation may take months or years.

      All copolymer composition ratios recited herein refer to mole ratios, unless specifically indicated otherwise.

      As used herein, "plastic article" means a copolymer processed into a  
25       film, sheet, fiber, foam, molded article, nonwoven material, elastomer, adhesive, or consumer good, preferably a nonwoven material or consumer good comprising a nonwoven material. A "disposable plastic article" or "disposable article" refers to these articles, when they are likely to be disposable, whether or not they were intended as such. Preferred articles  
30       employ the nonwovens of the invention.

      As used herein "adhesive" means a material that joins two other materials, called adherents, together. These adherents can be sheets, fibers and the like. Preferably the adherent is a fiber, thus the adhesive binds the fibers together into a nonwoven material.


35       As used herein the term "nonwoven" means, textile-like material, usually in flat sheet form, comprising fibers assembled in webs that are manufactured by processes other than spinning, weaving or knitting. Such

material may be porous or non porous. "Textile like" refers to material used in the manufacture of textiles as well as material made to perform in a manner similar to textiles, without being woven, spun or knitted into textiles. Nonwoven materials include nonwoven fabrics, bonded fabrics, formed fabrics, engineered fabrics, paper-like materials and the like. Nonwoven materials are useful, for example, as topsheets or backsheets for disposable sanitary articles and the like.

As used herein a "disposable sanitary article" includes any object made from the materials described herein that is worn on the body for hygienic or medical purposes. Thus disposable sanitary articles include catamenial products, incontinence products, bandages, wound dressings, surgical pads and the like.


The PHAs disclosed herein are useful as adhesives in nonwovens.

PHAs useful in the present invention comprise at least two randomly repeating monomer units wherein each randomly repeating monomer unit has the structure:

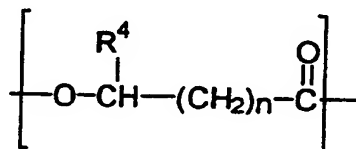


wherein each  $\text{R}^4$  is chosen from H, or any of  $\text{C}_1$  to about  $\text{C}_{19}$  alkyl or  $\text{C}_1$  to about  $\text{C}_{19}$  alkenyl and each  $n$  is 1 to about 4.

Preferably PHAs useful in the present invention comprise at least two randomly repeating monomer units wherein the first monomer unit has the structure;

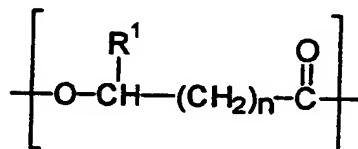

wherein  $\text{R}^1$  is H, or  $\text{C}_1$  to about  $\text{C}_{19}$  alkyl or  $\text{C}_1$  to about  $\text{C}_{19}$  alkenyl, and  $n$  is independently 1 or 2; the second monomer unit has the structure:




wherein  $\text{R}^2$  is about  $\text{C}_3$  to about  $\text{C}_{19}$  alkyl or  $\text{C}_3$  to about  $\text{C}_{19}$  alkenyl; and wherein at least 50% of the random repeating monomer units have the structure of the first monomer unit.




In a preferred embodiment, the first monomer unit has the above structure, wherein R<sup>1</sup> is H, C<sub>1</sub> or C<sub>2</sub> alkyl and n is 1 or 2.

A description of the synthesis of PHAs useful in the present invention and their properties, such as crystallinity, melt temperature and the like, as well as a description of products made using these PHAs is found in  
 5 copen ding U.S. Patent Application Serial No. 08/370,738, filed January 12, 1995, incorporated herein by reference. Specifically this application describes PHAs having two randomly repeating monomer units wherein the first randomly repeating monomer unit has the structure

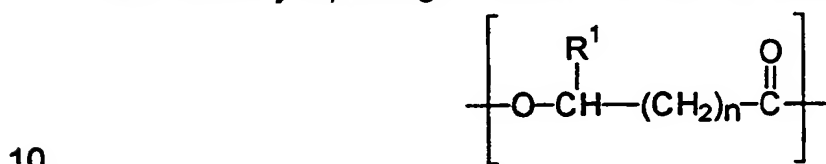


wherein R<sup>1</sup> is H, or C<sub>1</sub> or C<sub>2</sub> alkyl, and n is 1 or 2; the second randomly repeating monomer unit has the structure

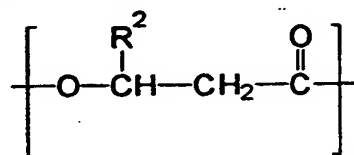


15 wherein R<sup>2</sup> is a C<sub>3</sub> to about C<sub>19</sub> alkyl or C<sub>3</sub> to about C<sub>19</sub> alkenyl; and wherein at least 50% of the randomly repeating monomer units have the structure of the first randomly repeating monomer unit.

Additional PHAs useful in the present invention include those set forth in U.S. Patent Application Serial No. 08/188,271, filed January 28, 1994, incorporated herein by reference. Specifically this application  
 20 describes PHAs having two randomly repeating monomer units; the first randomly repeating monomer unit having the structure




the second randomly repeating monomer unit having the structure




25 and wherein at least 50% of the randomly repeating monomer units have the structure of the first randomly repeating monomer unit.

Additional PHAs useful in the present invention include those set forth in U.S. Patent Application Serial No. 08/422,011, filed April 13, 1995, incorporated herein by reference. Specifically this application describes PHAs having two randomly repeating monomer units; the first randomly repeating monomer unit having the structure



wherein R<sup>1</sup> is H or C<sub>2</sub> alkyl, and n is 1 or 2; the second randomly repeating monomer unit having the structure



and wherein at least 50% of the randomly repeating monomer units have the structure of the first randomly repeating monomer unit. Related disclosure of these PHAs is found in U.S. Patent Application Serial No. 08/188,271, filed January 28, 1994, U.S. Patent Application Serial No. 08/422,011, filed April 13, 1995, U.S. Patent Application Serial No. 08/203,260, filed February 28, 1994, which describe a nonwoven comprising PHA, and method of making it, and U.S. Patent Application Serial No. 08/203,289, filed February 28, 1994, which describes a nonwoven comprising PHA, and method of making it.

The structures of the polymers contained in these references are all within the scope of the structure described in the summary and in the claims.

In one embodiment of the present invention, at least about 50%, but less than 100%, of the randomly repeating monomer units (RRMUs) have the structure of the first RRMU; more preferably at least about 60%; more preferably at least about 70%; more preferably at least about 80%; more preferably still at least about 90%.


Preferred RRMUs of this embodiment include the following:

	<u>R<sup>1</sup></u>	<u>n</u>	<u>Repeating Unit Name</u>
	Methyl	1	3-hydroxybutyrate
	Ethyl	1	3-hydroxyvalerate
	H	2	4-hydroxybutyrate
	H	4	6-hydroxycaproate
	Methyl	4	6-hydroxycaprylate

H	3	5-hydroxyvalerate
Methyl	3	5-hydroxycaproate

The preceding list of RRMUs for any embodiment is not exhaustive. Certainly other RRMUs are envisioned, all of which are embraced by the claims. Variations of these will be immediately apparent to the skilled artisan.

In another embodiment, the copolymer useful in the present invention comprises one or more additional RRMUs having the structure

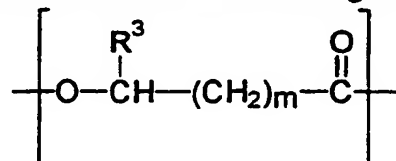

wherein  $\text{R}^3$  is H, or  $\text{C}_1$  to about  $\text{C}_{19}$  alkyl or  $\text{C}_1$  to about  $\text{C}_{19}$  alkenyl; and  $m$  is 1 or 2; and wherein the additional RRMUs are not the same as the first RRMU or the second RRMU. Preferably the copolymer comprises 3 to about 20 or more different RRMUs.


In a preferred embodiment of the present invention,  $\text{R}^3$  is a  $\text{C}_1$  to about  $\text{C}_{19}$  alkyl or alkenyl; and  $m$  is 1.

Preferred RRMUs of this embodiment include the following:


$\text{R}^3$	$n$	Repeating Unit Name
Methyl	1	3-hydroxybutyrate
Ethyl	1	3-hydroxyvalerate
H	2	4-hydroxybutyrate
H	1	6-hydroxypropionate

The preceding list of RRMUs for any embodiment is not exhaustive. Certainly other RRMUs are envisioned, all of which are embraced by the claims. Variations of these will be immediately apparent to the skilled artisan.

Preferably, the PHAs used in the present invention comprising two RRMUs have a first RRMU having the structure




wherein  $\text{R}^1$  is H, or  $\text{C}_1$  or  $\text{C}_2$  alkyl, and  $n$  is 1 or 2; and a second RRMU having the structure




- wherein when  $\text{R}^1$  is  $\text{C}_1$  or  $\text{C}_2$  and  $n$  is 1,  $\text{R}^2$  is a  $\text{C}_{12}$  to about  $\text{C}_{19}$  alkyl or alkenyl; when  $\text{R}^1$  is  $\text{C}_1$  or  $\text{C}_2$  and  $n$  is 2,  $\text{R}^2$  is a  $\text{C}_3$  to about  $\text{C}_{19}$  alkyl or alkenyl; and when  $\text{R}^1$  is H and  $n$  is 1 or 2,  $\text{R}^2$  a  $\text{C}_3$  to about  $\text{C}_{19}$  alkyl or alkenyl; and wherein at least 50% of the RRMUs have the structure of the first RRMU. More preferably  $\text{R}^2$  is an alkyl.


Yet more preferably, novel biodegradable PHAs of the present invention comprising three RRMUs, have a first RRMU having the structure

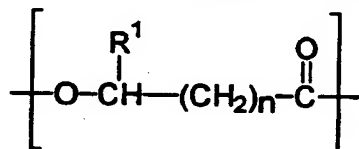

- wherein  $\text{R}^1$  is H, or  $\text{C}_1$  or  $\text{C}_2$  alkyl or  $\text{C}_1$  or  $\text{C}_2$  alkenyl, and  $n$  is independently 1 or 2; a second RRMU having the structure



wherein  $\text{R}^2$  is a  $\text{C}_3$  to about  $\text{C}_{19}$  alkyl or  $\text{C}_3$  to about  $\text{C}_{19}$  alkenyl; and a third RRMU having the structure

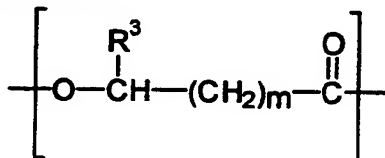

- wherein  $\text{R}^3$  is H, or a  $\text{C}_1$  to about  $\text{C}_{19}$  alkyl or  $\text{C}_3$  to about  $\text{C}_{19}$  alkenyl; and  $m$  is 1 or 2; wherein at least 50% of the RRMUs have the structure of the first RRMU; and wherein the third RRMU is not the same as the first RRMU or the second RRMU.

- Synthesis of biodegradable PHAs, and attendant considerations such as crystallinity, melt temperature and the like are described in U.S. Patent Application Serial No. 08/465,046, filed June 6, 1995, U.S. Patent Application Serial No. 08/422,009, filed April 13, 1995, U.S. Patent Application Serial No. 08/422,008, filed April 13, 1995, U.S. Patent Application Serial No. 08/188,271, filed January 28, 1994, U.S. Patent Application Serial No. 08/422,011, filed April 13, 1995, U.S. Patent

Application Serial No. 08/203,260, filed February 28, 1994 and U.S. Patent Application Serial No. 08/203,289, filed February 28, 1994, all incorporated herein by reference; hereinafter collectively referred to as the "Parent Applications").

- 5       The PHAs of the present invention can be processed into a variety of plastic articles, including but not limited to, films, sheets, fibers, foams, molded articles, nonwoven materials, elastomers, and adhesives. Disclosure related to the preparation of such articles is found in the Parent Applications. Of particular interest in this application is the use of PHAs in  
10 nonwoven materials preferably their use as adhesives (e.g., binders) in making those nonwoven materials.

#### Nonwoven Materials and Adhesives Comprising PHA

##### A. Nonwovens

- 15       A general overview of nonwoven materials can be found in the ENCYCLOPEDIA OF POLYMER SCIENCE AND ENGINEERING, Second Edition, Vol. 10, pp. 204-226 (referred to hereafter as "EPSE-4"). The thickness of the nonwoven sheets may vary from 25  $\mu\text{m}$  to several centimeters, and the weight from 10  $\text{g/m}^2$  to 1  $\text{kg/m}^2$ .

- 20       In contrast to conventional textiles, the fundamental structure of all nonwovens is a web of fibers arranged more or less randomly (NONWOVENS IND., Vol. 17, p. 36 (Mar. 1986), NONWOVENS WORLD, Vol. 1, p. 36 (May-June 1986)). Nonwoven materials have a wide range of physical properties depending on the material and process used in forming the fiber web foundation of the nonwoven. This material may be self-supporting and stiff  
25 like paper or drapable like a conventional cloth. Tensile, tear, and tactile properties in the nonwoven arise from the fiber and adhesive or other chemical and physical bonding, fiber-to-fiber friction created by entanglement, and reinforcement by other materials such as foams and films (see EPSE-4).

- 30   1.   Method of Manufacture of Nonwoven Materials

- The nonwoven materials of the present invention may be made by conventional techniques known in the art. Typically the production of nonwoven materials involves: 1) making fibers of various lengths and diameters; 2) creating a web of these fibers; and 3) bonding of fibers within  
35 the web by adhesive (sometimes called a binder), or by mechanical-frictional forces created by fiber contact or entanglement, although this process need not necessarily take place in this order. In addition to these

steps, reinforcing the web by forming a composite with other materials (e.g., yarns, scrims, films, nettings, and unbonded webs) is sometimes preferred. Variations of one or several of these steps or their order allows for the enormous range of processes and of nonwoven fiber types.

5       The term "staple fibers" was originally applied to fibers of natural origin long enough to be processed on textile machinery, but excluding endless filaments, e.g., silk. In the present context, "staple fibers" are of relatively uniform length, ca. 1.3-10.2 cm, with a regular crimp i.e., a three-dimensional wavelike shape. Regenerated and other extruded fibers which  
10       are endless as formed, are typically cut during the manufacturing process to meet a processing or market need or specification. Extruded fibers can also be produced as continuous filaments without crimp.

15       The processes for forming webs from staple fibers differ from those using continuous filaments. Nonwoven material obtained from staple and filament fiber webs may differ substantially in properties (see EPSE-4).

      The mechanical properties of the fibers, as well as of the adhesives used to adhere the nonwoven fibers to each other influences the properties of the nonwoven (see EPSE-4).

20       Other fibrous materials that may be used in the nonwovens of the present invention in combination with the PHA are natural fibers such as silk, wool, linen and the like; cellulosics, such as wood pulp, paper fibers, cotton, cellulose and the like; regenerated fibers including viscose rayon and cellulose acetate and the like; and synthetic fibers like polyesters, such  
25       as poly(ethylene terephthalate) (PET), other PHAs and the like; the polyamides, such as nylon-6, nylon 6,6, and the like; polyalkylenes, such as polypropylene (PP), polyethylene (PE) and other synthetics such as poly(vinyl alcohol) and the like.

30       The choice of fiber depends upon the intended application. For example, facings of disposable diapers or sanitary napkins made from PHA nonwoven materials of the present invention preferably feel dry even when the absorbent, inner layer is saturated. Hence, a hydrophobic polymer, such as a polyester, polyamide, polyalkylene and the like, is preferred for use in these products.

35       For applications where water absorbency is desirable, hydrophilic fibers are preferred. For example, a cellulosic fiber or a polyvinyl alcohol fiber or the like would be preferred in making a nonwoven towelette.

For applications where fluid impermeability is desirable, the nonporous nonwoven preferably employ:

- 1) fibers which repel fluids;
  - 2) a web dense enough to provide avoid holes or pores in the nonwoven;
  - 5 3) enough adhesive to seals any holes or pores in the nonwoven web,
- Such nonporous nonwoven materials are useful for mailing envelopes, containers, vapor barriers, diaper backsheets and the like

Other important fiber characteristics that affect performance include length, diameter, density, crimp, cross section shape, spin-finish (e.g.,  
10 lubricant added to the surface of extruded fibers to enhance processability), delustering (e.g., small amounts of TiO<sub>2</sub> pigment added before extrusion to increase whiteness or to reduce sheen) and the draw ratio. These are all related to the fiber or the fiber web, and are discussed in EPSE-4.

These nonwovens can be made by several methods, for example the  
15 methods of Noda et al. exemplified in U.S. patent applications 08/203,260, filed February 28, 1994, and 08/203,289, filed February 28, 1994, incorporated herein by reference, as well as art recognized methods.

a. Web-making methods

The characteristics of the fiber web influence the physical properties  
20 of the final product. These characteristics depend on fiber architecture, which is determined by the mode of web formation. Fiber architecture includes the predominant fiber direction, whether oriented or random, fiber shape (straight, hooked, or curled), the extent of interfiber engagement or entanglement, crimp, and compaction (web-density control). Web  
25 characteristics are also influenced by fiber diameter, length, web weight, and chemical and mechanical properties of the fiber material (see EPSE-4).

The choice of method for forming the web is determined primarily by fiber length. Initially, the methods for forming webs from staple-length fibers  
30 (fibers long enough to be handled by conventional spinning equipment, usually from about 1.2 to about 20 cm long, but not endless) are based on the textile-carding process, whereas web formation from short fibers is based on papermaking technologies. Although these technologies are still in use, other methods have been subsequently developed. For example,  
35 webs are formed from long, virtually endless filaments directly from bulk polymer; both web and fibers are produced simultaneously (see EPSE-4). A

variety of web-making methods are known, including carding, air-laying, wet-forming, spunbonding, and meltblowing.

Carding separates clumps of staple fibers mechanically into individual fibers and formed into a coherent web by the mechanical action of moving beds of closely spaced needles.

Air-laying improves orienting of fibers by capturing fibers on a screen from an airstream (see U.S. Patent No. 3,338,992, G. A. Kinney, assigned to E.I. du Pont de Nemours & Co., Inc., issued August 29, 1967). The fibers are separated by teeth or needles and introduced into an airstream.

Wet-forming typically employs very short fibers. Initially, webs are formed from short fibers by modified papermaking techniques. The fibers are continuously dispersed in a large volume of water or solvent and caught on a moving endless wire screen. Once the web is caught on the screen, it is transferred to belts or felts and dried on heated drums (see EPSE-4).

Spunbonding involves making fibers and web simultaneously, directly from bulk polymer. The bulk polymer is melted, extruded, and drawn into virtually endless filaments that are randomized and deposited onto belts as a continuous web. This process produces webs of low crimp filaments in the normal diameter range of about 1.7 dtex (1.5 den) or slightly higher. The birefringence and uniformity of diameter of these filaments are similar to standard textile fibers and filaments (see EPSE-4 and U.S. Pat. 4,163,305 (Aug. 7, 1979), V. Semjonow and J. Foedrowitz (to Hoechst AG)).

Meltblowing prepares webs directly from bulk polymers (see U.S. Patent No. 3,322,607, S.L. Jung, assigned to E.I. duPont de Nemours & Co., Inc., May 30, 1967). For example, molten PHA forced through very fine holes in a special die into a high velocity airstream forms very fine, although irregular, filaments of indeterminate lengths. The filaments are formed into a web and bonded simultaneously (see EPSE-4). The web consists primarily of very fine filaments.

b. Web bonding

The bonding of fibers (i.e., the adhering of fibers to each other) gives the strength to the web and influences the nonwoven properties. Both adhesive and mechanical means are used in bonding. Mechanical bonding uses bonding of fibers by frictional forces. Bonding can also be achieved by chemical means, e.g., formation of covalent bonds between binder and fibers (see EPSE-4).



In a preferred method, this bonding is accomplished with a compostable material, more preferably a PHA, as an adhesive. Such a preferred method of bonding of fibers used in a nonwoven material is described herein below.

5    **B.    Adhesive**

          A general discussion on adhesives can be found in the Encyclopedia of Polymer Science and Engineering, Vol. 1, pp. 547-577, (hereafter referred to as "EPSE-6"). Generally an adhesive is applied as a liquid, preferably of a low viscosity. The adhesive wets the adherent surface and  
10   may flow into the crevices in the adherent surfaces. In many cases, the liquid form of the adhesive is obtained by heating the adhesive to the point that flow occurs, dissolving or dispersing the material in a solvent, or starting with liquid monomers or oligomers that polymerize or react after application. Usually, the adhesive then solidifies by cooling, solvent  
15   evaporation, reaction or the like to provide the necessary strength to resist shearing forces.

          The PHAs of the present invention may be processed into a variety of adhesives, including but not limited to, hot melt, solution, dispersion and pressure sensitive adhesives.

20       The method of using these adhesives and the choice of adhesive will depend upon the properties sought, the material to which the adhesive is applied and the application intended. For example, in preparing a nonwoven material, one would consider the mechanical characteristics of the unbonded nonwoven and its desired end application.

25    **1.    Hot-melt Adhesives.**

          As used herein, "hot-melt adhesive" refers to a thermoplastic polymer or copolymer (e.g., a PHA) that is heated to obtain a liquid of flowable viscosity, and, after application, cooled to obtain a solid. Generally, the molecular weight of the adhesive is tailored to provide good rheology as a  
30   melt and sufficient strength as a solid to resist shearing forces experienced in the application. The PHAs of the present invention are thermoplastic, and thus are particularly useful as hot-melt adhesives. The primary feature of hot-melt adhesives is the ability of the thermoplastic material (PHA) to flow above a certain temperature, and to provide a strong bond at the  
35   normal use temperature. Upon cooling, the material hardens, either through passing through the glass transition temperature or the crystallization temperature. This hardening lends physical integrity to the bond.

2. Solutions and Dispersions.

The adhesives of this invention may be applied either as solutions or in the form of aqueous dispersions. When using a solution or dispersion, heating is preferred to expedite drying or "setting" of the adhesive. The dispersion solids can vary from 5 to 95%, preferably less than 50%.

As used herein, "dispersion" refers to adhesives which are prepared or dispersed as larger particles in some carrier fluid. In addition to their economic advantage, dispersions containing 40-50% solids offer lower viscosity than solutions, even if the solids are high molecular-weight polymers (EPSE-6). Adhesive dispersions of the present invention may be dispersed by high shear in the presence of surfactants to obtain waterborne formulations by procedures which are well known to those skilled in the art.

One preferred method of using the adhesive is to prepare a solution or dispersion of the PHA in toluene, ethyl acetate, acetone, halogenated solvents (e.g., chloroform, 1,2 dichloroethane and the like) or other suitable solvent. To this solution or dispersion it is preferred that a surfactant be added. Surfactants may increase wetting ability of the adhesive, as well as dispersion characteristics. Preferably the surfactant is an anionic surfactant, cationic surfactant, zwitterionic surfactant, nonionic surfactant, amphoteric surfactant or the like, preferably a cationic surfactant. Preferred surfactants are described in U.S. Patent No's. 4,835,211, Noda et al., issued May 30, 1989, and 4,785,030, Noda et al., issued November 15, 1988, incorporated herein by reference.

A more preferred surfactant is a surfactant of formula X-Y-Z; wherein X is a cationic radical chosen from primary, secondary or tertiary amines and their cations, quaternary ammonium, sulfonium and phosphonium and the like; Y is a nonionic diradical having up to about 20 repeating monomer units of  $-(OCH_2CH_2)-$ ; and Z is an alkyl or alkenyl radical comprising of from about 8 to about 20 carbons which is branched or linear and substituted or unsubstituted.

In a preferred embodiment, this surfactant is present in about 0.5% to about 20% by weight; preferably about 1% to about 10% by weight; more preferably about 2% to about 5% by weight. Where a surfactant is used, water may be added to the solution or dispersion. Where water is added, it may be preferable to remove any solvent in the solution or dispersion. This provides an "environmentally friendly" adhesive.

3. Pressure-sensitive Adhesives.

These adhesives are discussed in detail in U.S. Patent application Serial No. 08/465,046, filed June 6, 1995, incorporated herein by reference.

10 4. Use of adhesives as binders in nonwovens

PHAs can be used as adhesives or "binders" in nonwoven materials. For longer fiber nonwovens, it is preferred that the nonbonded material be formed and then coated using the art recognized "dip" coating process, wherein the nonwoven is run through a bath of adhesive in a dispersion or solution, preferably a colloidal dispersion in water. The adhesive then dries or sets and is optionally pressed to provide the bonded nonwoven.

For materials lacking the mechanical integrity to withstand dip coating, it is preferred that spray coating be used. Spray coating uses a sprayed adhesive, preferably a heated water dispersion of the adhesive, which then dries or cures and is optionally pressed to provide the bonded nonwoven.

For materials which are made from fibers that are too short to be spray coated, the fibers themselves can be coated in a bath and the nonwoven formed from these adhesive coated materials. In this case, the nonwoven material typically cannot be formed in the absence of binder. Spray coating would likely disperse the fibers. Consequently, coating the fibers in a bath is preferred, for example, in making paper like materials.

In a preferred embodiment of the present invention, the adhesive is dispersed in an aqueous medium with the aid of a surfactant. Preferably, the surfactant will promote the spontaneous deposition of the adhesive to fibers. In a more preferred embodiment, the surfactant is of formula X-Y-Z; wherein X is a cationic radical chosen from primary, secondary or tertiary amines and their cations, quaternary ammonium, sulfonium and phosphonium and the like; Y is a nonionic diradical having up to about 20 repeating monomer units of  $-(OCH_2CH_2)-$ , preferably 5 to about 20, more preferably about 10 to about 20; and Z is an alkyl or alkenyl radical comprising of from about 8 to about 20 carbons which is saturated or

unsaturated, branched or linear, preferably saturated or monounsaturated, and of from about 15 to about 20 carbons.

#### Disposable Personal Care Products

5 The nonwovens described above are useful in many disposable products: For example, disposable sanitary articles comprising a liquid pervious topsheet comprising the nonwoven comprising the PHA of the invention, a liquid impervious backsheet, and an absorbent core positioned between the topsheet and backsheet. Such articles include infant diapers, adult incontinent briefs and pads, and feminine hygiene pads, liners and the  
10 like.

Additional personal care products comprising a PHA of the present invention include personal cleansing wipes; disposable health care products such as bandages, wound dressings, wound cleansing pads, surgical gowns, surgical covers, surgical pads; other institutional and health care  
15 disposables such as gowns, wipes, pads, bedding items such as sheets, pillowcases, and foam mattress pads.

Additional absorbent articles include paper products, such as towelettes, tissues, paper towels, disposable washcloths and the like: personal care products, such as sanitary napkins, diapers, incontinence  
20 briefs and the like; health care products, such as wound dressings, bandages, and the like. Many other absorbent articles are known in the art and are contemplated.

Importantly, the absorbent articles of this invention are biodegradable and/or compostable to a greater extent than conventional absorbent articles  
25 which employ standard materials, such as polyolefins, and the like.

The following examples are not intended to limit or define the invention in any way. The following nonlimiting examples merely illustrate the invention and teach the skilled artisan how to make and use the invention. Of course, it is obvious to the skilled artisan that variation of  
30 these examples, including any permutation claimed in this application can be prepared by the skilled artisan in light of the examples following.

Additional examples of preparation of PHAs used herein below, as well as further disclosure and examples of the manufacture of these articles and examples thereof, including the preparation of films, sheets, fibers,  
35 foams, molded articles and elastomers are described in the Parent Applications.

### EXAMPLE 1

#### Compostable Nonwoven Fabric

Poly(3-hydroxybutyrate-co-3-hydroxyoctanoate) (PHB-O) at 2 mole% octanoate/ 98 mole% butyrate is introduced into a single screw extruder (Rheomix Model 202, Paramus, NJ) with screw diameter of 0.75 inch. A constant taper screw having 20:1 length to diameter ratio and a 3:1 compression ratio is employed. The temperature of both heating zones of the extruder barrel is 25°C above the melt temperature of the PHB-O. The extruder is equipped with a nozzle die containing 5 orifices of diameter 500 mm. The die is maintained at 20°C above the melt temperature of the PHB-O. The polymer is melted within the extruder and pumped to the die at the other end of the extruder. The screw rpm is kept constant at 30 rpm. The polymer is forced through the die and the melted extruded fibers are lead through a region where a rapid air stream is applied such that the polymer fibers elongates and thins to approximately one fifth of the diameter of the orifices (ca. 100  $\mu$ m). The fibers are collected on a cardboard mat. The mat is moved in a fashion so that a 10 cm x 10 cm area is covered uniformly with fibers. Collection of fibers on the mat continues, until there is approximately 0.5 cm thick fiber mat. A wide distribution of fiber lengths are obtained up several inches in length. Most fiber lengths (over 50%) are in the range of 0.5 to 6 inches. The mat is then transferred to a Carver Press (Fred S. Carver Inc., Menomonee Falls, WI) and pressed at a 1000 lb. force for 10 minutes at temperature 5°C below the melting temperature of the PHB-O. The resulting nonwoven sheet is removed from the press.

### EXAMPLE 2

#### Compostable Adhesive

PHB-O (50:50) may be used as a hot-melt adhesive in the following manner. About 1g of PHB-O (50:50) is placed between two polymer films, such as poly(vinyl alcohol) (PVA), or poly(3-hydroxybutyrate) (PHB) or any other PHA which has a melting temperature at least 10°C higher than PHB-O (50:50). The films/adhesive assembly is placed in a Carver Press (Fred S. Carver Inc., Menomonee Falls, WI) and is then pressed at a temperature 5°C above the melt temperature of PHB-O (50:50). After compression at 2000 lb. force for 30 min., the pressure is released and the bonded film assembly is allowed to cool to room temperature.

### EXAMPLE 3

#### A. Dispersion of PHA Binder

5 A solution made of 50 g of 92:8 poly(3-hydroxybutyrate-co-hydroxyoctanoate) copolymer dissolved in 450 g of an organic solvent such as chloroform is emulsified in 2 liters of water with the aid of sonicator. An emulsifier, e.g., oleyl ethoxylate as VOLPO-20 (Croda, Inc.) can be used in the mixture to stabilize the emulsion. The organic solvent is subsequently evaporated from the emulsion to obtain a dispersion of the copolymer binder.

B. Nonwovens Made by Dip Coating of PHA Binder

10 2.62 g (2.5 g dry wt.) unrefined Northern Softwood Kraft (NSK) pulp is dispersed in 500 ml tap water at ambient pH (ca. 7.5). The handsheet is made on a standard Deckle Box using tap water at ambient pH (ca. 7.5) and dried on a drum drier at 115°C. The handsheet is then immersed in the dispersion of PHA binder as described above and dried again to produce a nonwoven sheet.

15

EXAMPLE 4

Compostable Nonwoven Fabric

20 Using the PHB-O of Example 1 and the hot melt adhesive of Example 2, a compostable nonwoven fabric is prepared by placing the fibers collected on a cardboard mat with the adhesive into a Carver Press as in Example 1, thus forming a nonwoven wherein the fiber and the binder is of PHA.

**EXAMPLE 5****A. Dispersion of Cationic PHA Binder**

A solution made of 50 g of 98:2 poly(3-hydroxybutyrate-co-hydroxyoctadecanoate) copolymer dissolved in 450 g of an organic solvent such as chloroform is emulsified in 2 liters of water with the aid of sonicator. An emulsifier, e.g., oleyl ethoxylate as VOLPO-20 can be used in the mixture to stabilize the emulsion. To the emulsion 1.0 g of a cationic emulsifier, e.g. oleyl ethoxylate end-capped with a quaternary ammonium moiety as described in patents granted to Noda et al. (U.S. Pat. No's. 4,835,211, issued May 30, 1989, and 4,785,030, issued November 15, 1988) is added. The organic solvent is subsequently evaporated from the emulsion to obtain a cationic dispersion of the copolymer binder.

**B. Nonwoven Fabrics Made by Wet-End Deposition of PHA Binder**

2.62 g (2.5 g dry wt.) unrefined Northern Softwood Kraft (NSK) pulp is dispersed in 500 ml tap water at ambient pH (ca. 7.5). 1.0 g of cationic binder dispersion described in A is added to the pulp slurry and stirred for 30 minutes to promote the deposition. The handsheet is made on a standard Deckle Box using tap water at ambient pH (ca. 7.5) and dried on a drum drier at 115°C.

**EXAMPLE 6****A. Dispersion of Cationic PHA Binder**

A solution made of 50 g of 90:10 poly(3-hydroxybutyrate-co-hydroxyhexanoate) copolymer dissolved in 450 g of an organic solvent such as chloroform is emulsified in 2 liters of water with the aid of sonicator. An emulsifier, e.g., oleyl ethoxylate as VOLPO-20 can be used in the mixture to stabilize the emulsion. To the emulsion 1.0 g of a cationic emulsifier, e.g. oleyl ethoxylate end-capped with a quaternary ammonium moiety as described in patents granted to Noda et al. (U.S. Pat. No's. 4,835,211, issued May 30, 1989, and 4,785,030, issued November 15, 1988) is added. The organic solvent is subsequently evaporated from the emulsion to obtain a cationic dispersion of the copolymer binder.

**B. Nonwoven Fabrics Made by Wet-End Deposition of PHA Binder**

2.62 g (2.5 g dry wt.) unrefined Northern Softwood Kraft (NSK) pulp is dispersed in 500 ml tap water at ambient pH (ca. 7.5). 1.0 g of cationic binder dispersion described in A is added to the pulp slurry and stirred for 30 minutes to promote the deposition. The handsheet is made on a

standard Deckle Box using tap water at ambient pH (ca. 7.5) and dried on a drum drier at 115°C.

#### EXAMPLE 7

##### A. Dispersion of Cationic PHA Binder

5 A solution made of 50 g of 92:8 poly(3-hydroxybutyrate-co-hydroxyoctanoate) copolymer dissolved in 450 g of an organic solvent such as chloroform is emulsified in 2 liters of water with the aid of sonicator. An emulsifier, e.g., oleyl ethoxylate as VOLPO-20 can be used in the mixture to stabilize the emulsion. To the emulsion 1.0 g of a cationic emulsifier, e.g.  
10 oleyl ethoxylate end-capped with a quaternary ammonium moiety as described in patents granted to Noda et al. (U.S. Pat. No's. 4,835,211, issued May 30, 1989, and 4,785,030, issued November 15, 1988) is added. The organic solvent is subsequently evaporated from the emulsion to obtain a cationic dispersion of the copolymer binder.

##### 15 B. Nonwovens Made by Wet-End Deposition of PHA Binder

2.62 g (2.5 g dry wt.) unrefined Northern Softwood Kraft (NSK) pulp is dispersed in 500 ml tap water at ambient pH (ca. 7.5). 1.0 g of cationic binder dispersion described in A is added to the pulp slurry and stirred for 30 minutes to promote the deposition. The handsheet is made on a  
20 standard Deckle Box using tap water at ambient pH (ca. 7.5) and dried on a drum drier at 115°C.

#### EXAMPLE 8

##### Continuous Production of Nonwovens with PHA Binder

The applicability of cationic dispersion of PHA as a binder for  
25 nonwovens produced by wet-end deposition process is as follows. Approximately 220 kg (dry weight) of refined northern Kraft pulp is dispersed in water at the consistency of about 2.5% and kept in a stirred holding tank. About 400 liters of cationic binder dispersion (prepared according to Example 7A) is added to the pulp to achieve the wet-end  
30 deposition of the binder.

The binder-treated pulp is then fed to a pilot-scale paper machine (equipped with normal papermaking process components, such as headbox, forming wire, and continuous dryer) at a rate of 80L/min. The paper machine is operated at the production speed of 200 m/min.



### EXAMPLE 9

#### Compostable Disposable Diaper

A disposable baby diaper according to this invention is prepared as follows. The dimensions listed are for a diaper intended for use with a child  
5 in the 6-10 kilogram size range. These dimensions can be modified proportionately for different size children, or for adult incontinence briefs, according to standard practice.

1. Backsheet: 0.020 - 0.038 mm film consisting of a 92:8 poly(3-hydroxybutyrate-co-hydroxyoctanoate) copolymer; width at top and bottom  
10 33 cm; notched inwardly on both sides to a width-at-center of 28.5 cm; length 50.2 cm.

2. Topsheet: a topsheet of nonwoven fabric of Example 8: width at top and bottom 33 cm; notched inwardly on both sides to a width-at-center of 28.5 cm; length 50.2 cm.

15 3. Absorbent core: comprises 28.6 g of cellulose wood pulp and 4.9 g of absorbent gelling material particles (commercial polyacrylate from Nippon Shokubai); 8.4 mm thick, calendered; width at top and bottom 28.6 cm; notched inwardly at both sides to a width-at-center of 10.2 cm; length 44.5 cm.

20 4. Elastic leg bands: four individual rubber strips (2 per side); width 4.77 mm; length 370 mm; thickness 0.178 mm (all the foregoing dimensions being in the relaxed state).

The diaper is prepared in standard fashion by positioning the core material covered with the topsheet on the backsheet and gluing.

25 The elastic bands (designated "inner" and "outer", corresponding to the bands closest to, and farthest from, the core, respectively) are stretched to ca. 50.2 cm and positioned between the topsheet/backsheet along each longitudinal side (2 bands per side) of the core. The inner bands along each side are positioned ca. 55 mm from the narrowest width of the core (measured from the inner edge of the elastic bank). This provides a  
30 spacing element along each side of the diaper comprising the flexible topsheet/backsheet material between the inner elastic and the curved edge of the core. The inner bands are glued down along their length in the stretched state. The outer bands are positioned ca. 13 mm from the inner  
35 bands, and are glued down along their length in the stretched state. The topsheet/backsheet assembly is flexible, and the glued-down bands contract to elasticize the sides of the diaper.

**EXAMPLE 10****Compostable Lightweight Pantiliner**

A lightweight pantiliner suitable for use between menstrual periods comprises a pad (surface area 117 cm<sup>2</sup>; SSK air felt 3.0 g) containing 1.0 g  
5 of absorbent gelling material particles (commercial polyacrylate; Nippon Shokubai); said pad being interposed between a porous topsheet of Example 8 according to U.S. Patent 4,463,045 and a backsheet which comprises a 0.03 mm thickness 92:8 poly(3-hydroxybutyrate-co-hydroxyoctanoate) copolymer film.

10

**EXAMPLE 11****Compostable Sanitary Napkin**

A catamenial product in the form of a sanitary napkin having two flaps extending outward from its absorbent core is prepared using a pad in the manner of Example 10 (surface area 117 cm<sup>2</sup>; 8.5 g SSK air felt), per  
15 the design of U.S. Patent 4,687,478, Van Tillburg, August 18, 1987.

**EXAMPLE 12****Compostable Disposable Diaper**

The diaper of Example 9 is modified by replacing the backsheet with a backsheet consisting of a 0.020 to 0.038 mm thickness film comprising a  
20 92:8 poly(3-hydroxybutyrate-co-hydroxydecanoate) copolymer film.

**EXAMPLE 13****Compostable Disposable Diaper**

The diaper of Example 12 is modified by replacing the nonwoven backsheet with a backsheet made from the nonwoven of Example 4.  
25

**EXAMPLE 14****Compostable Disposable Diaper**


The diaper of Example 12 is modified by replacing the nonwoven topsheet with a nonwoven porous topsheet prepared by the methods disclosed in copending U.S. Patent application 08/203,260, incorporated  
30 herein by reference.

All publications and patent applications mentioned hereinabove are hereby incorporated in their entirety by reference.

It is understood that the examples and embodiments described herein are for illustrative purposes only and that various modifications or  
35 changes in light thereof will be suggested to one skilled in the art and are to be included in the spirit and purview of this application and scope of the appended claims.

**WHAT IS CLAIMED IS:**

1. An adhesive dispersion comprising a biodegradable copolymer characterized in that the biodegradable copolymer comprises at least two randomly repeating monomer units characterized in that each randomly repeating monomer unit has the structure:

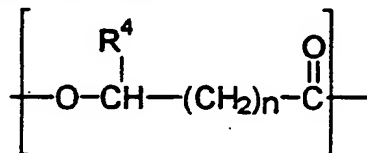

wherein  $\text{R}^4$  is H, or  $\text{C}_1$  to  $\text{C}_{19}$  alkyl or  $\text{C}_1$  to  $\text{C}_{19}$  alkenyl, and  $n$  is 1 to 4.

2. The adhesive dispersion of any preceding claim, further characterized by a surfactant of formula:




wherein;

X is a cationic radical chosen from the group consisting of primary, secondary or tertiary amines and their cations, and quaternary ammonium, and sulfonium and phosphonium;


Y is a nonionic diradical having up to 20 repeating monomer units of  $-(\text{OCH}_2\text{CH}_2)-$ ;

Z is an alkyl or alkenyl radical comprising of from 8 to 20 carbons which is branched or linear and substituted or unsubstituted.

3. The adhesive dispersion of any preceding claim, where the biodegradable polymer is further characterized by the two randomly repeating monomer units wherein a first randomly repeating monomer unit has the structure:

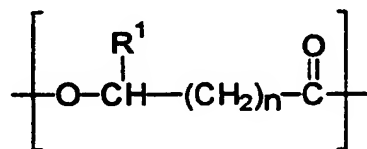


wherein  $\text{R}^1$  is H, or  $\text{C}_1$  to  $\text{C}_{19}$  alkyl or  $\text{C}_1$  to  $\text{C}_{19}$  alkenyl, and  $n$  is 1 or 2; and a second randomly repeating monomer unit having the structure:

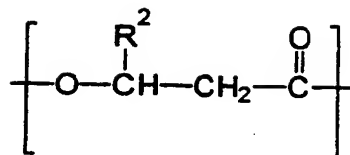

wherein  $\text{R}^2$  is  $\text{C}_3$  to  $\text{C}_{19}$  alkyl or  $\text{C}_3$  to  $\text{C}_{19}$  alkenyl; and wherein at least 50% of the randomly repeating monomer units have the structure of the first randomly repeating monomer unit.

4. The adhesive dispersion of any preceding claim, wherein  $\text{R}^1$  is H, or  $\text{C}_1$  or  $\text{C}_2$  alkyl, and  $n$  is 1 or 2, and  $\text{R}^2$  is  $\text{C}_3$  to  $\text{C}_{19}$  alkyl or  $\text{C}_3$  to  $\text{C}_{19}$  alkenyl.

5. The adhesive dispersion of any preceding claim, wherein the biodegradable copolymer further comprises one or more additional randomly repeating monomer units having the structure:

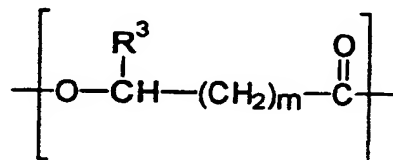

wherein  $\text{R}^3$  is H, or a  $\text{C}_1$ - $\text{C}_{19}$  alkyl or  $\text{C}_1$  to  $\text{C}_{19}$  alkenyl; and  $m$  is 1 or 2; and wherein the additional randomly repeating monomer units are not the same as the first randomly repeating monomer unit or the second randomly repeating monomer unit.

6. A nonwoven material further comprising fibers; and the adhesive of any preceding claim.

7. A liquid pervious topsheet comprising the nonwoven material of claim 6.

8. An absorbent article comprising the adhesive dispersion or nonwoven material of any preceding claim.

9. The absorbent article of claim 8 for personal hygiene.


10. A method of making the nonwoven material of Claim 1, comprising the steps of:  
a) combining the biodegradable polymer with a surfactant of formula:



wherein;

X is a cationic radical chosen from the group consisting of primary, secondary or tertiary amines and their cations, and quaternary ammonium, and sulfonium and phosphonium;

Y is a nonionic diradical having up to 20 repeating monomer units of



Z is an alkyl or alkenyl radical comprising of from 8 to 20 carbons which is saturated or unsaturated, branched or linear and substituted or unsubstituted;

- b) coating a fiber with the binder; and
- c) bonding the fibers together into a nonwoven material.

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 96/11864

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 C09J167/04 D04H1/64

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C09J C09D D04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	TAPPI JOURNAL, vol. 76, no. 5, May 1993, ATLANTA US, pages 71-77, XP000369471 C. A. LAUZIER ET AL.: "Film formation and paper coating with poly(beta-hydroxyalkanoate), a biodegradable latex" see page 75, middle column, line 3 - line 10 see page 71, left-hand column, line 1 - middle column, line 2 ---	1,2,4, 6-10
X	DE,A,40 40 158 (PCD PETROCHEMIE DANUBIA DEUTSCHLAND GMBH) 17 June 1992 see claims 1-4; examples 5,21,35 ---	1,2,4, 6-10
A	WO,A,95 02649 (ZENECA) 26 January 1995 see claims 1-11 -----	1-10

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \* "A" document defining the general state of the art which is not considered to be of particular relevance
- \* "E" earlier document but published on or after the international filing date
- \* "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \* "O" document referring to an oral disclosure, use, exhibition or other means
- \* "P" document published prior to the international filing date but later than the priority date claimed

- \* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \* "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \* "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \* "&" document member of the same patent family

Date of the actual completion of the international search

5 November 1996

Date of mailing of the international search report

14. 11. 96

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Decocker, L

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/11864

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-A-4040158	17-06-92	NONE	
WO-A-9502649	26-01-95	AU-A- 7129294	13-02-95
		CA-A- 2166613	26-01-95
		EP-A- 0708804	01-05-96
		FI-A- 960158	12-01-96
		NO-A- 960153	12-01-96

Form PCT/ISA/210 (patent family annex) (July 1992)

**THIS PAGE BLANK (USPTO)**